



SYSTEM PROFILE

VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

SYSTEM OVERVIEW

Tremco Roofing's VR LITE vegetated roof assemblies give designers all the functional elements of a high performance green roof adapted to budgetary and structural limitations. VR LITE systems offer succulent planting options in three growing media depths to suit your project's design parameters.

Whether you are concerned about cost, maintenance, or structural load capacities, there is a VR LITE system that is right

for your project, while still providing storm water retention and ecologically sustained plant communities that consistently out-perform comparable green roof systems.

Don't settle for second rate green roof systems anymore. With Tremco Roofing's VR LITE, you can deliver the green roof landscape you want, without breaking the bank or the roof.

MINIMUM MATERIALS. MINIMUM COST.

STILL OUT-PERFORMS THE COMPETITION.

STANDARD FEATURES & OPTIONS

- A heavy-duty percolation layer provides drainage below the growing media and prevents root rot
- Upgrade to a combined water retention and drainage panel for additional storm water retention
- Standard growing media depths of 2", 3" and 4"
- Desert Succulent plantings can be installed via cuttings, plugs, or pre-vegetated mats. Standard and custom blends available.


SYSTEM DETAILS

VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

SYSTEM COMPONENTS

- A** ROOT BARRIER
- (STANDARD) **B** PERCOLATION LAYER WITH FILTER FABRIC OVERLAY
- (UPGRADE) **C** WATER RETENTION & DRAINAGE PANEL WITH FILTER FABRIC OVERLAY
- D** ENGINEERED GROWING MEDIA
- E** VEGETATION OPTIONS:
SEDUM BLENDS
- F** EDGING RESTRAINT
- G** VEGETATION-FREE ZONE

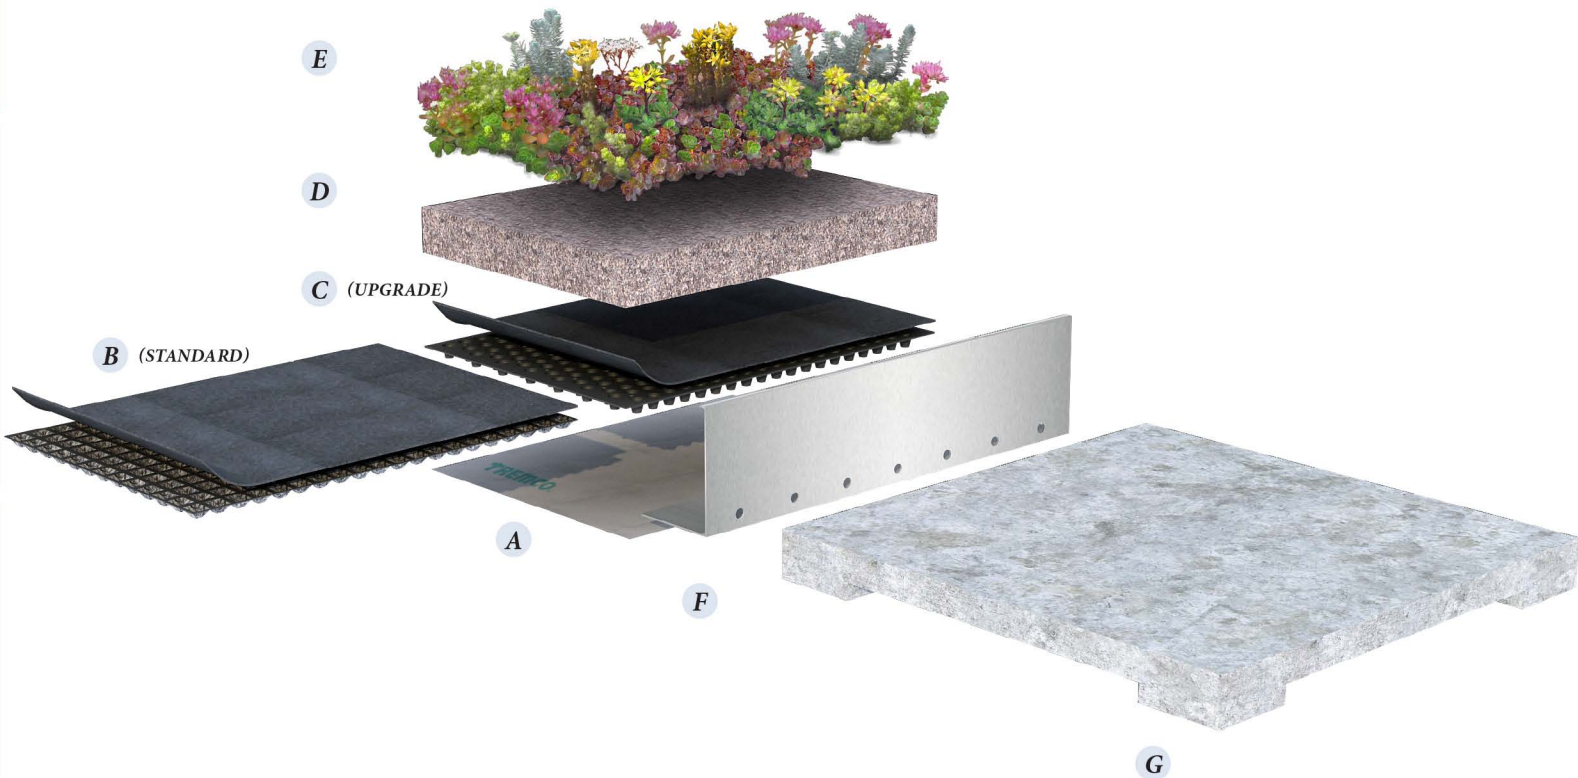



SYSTEM CRITICAL DATA SHEET

VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

ACCESSORIES ROOT BARRIER
DRAIN INSPECTION BOX
EDGING RESTRAINT
IRRIGATION



VR LITE

SYSTEM

VR LITE 2

VR LITE 3

VR LITE 4

GROWING MEDIA DEPTH

2"
50 MM

3"
75 MM

4"
100 MM

VEGETATION OPTIONS

SEDUM BLENDS:
STANDARD
CUSTOM

SEDUM BLENDS:
STANDARD
CUSTOM

SEDUM BLENDS:
STANDARD
CUSTOM

SATURATED WEIGHT

13.5 - 16.0 LB/SQ. FT.
65 - 80 KG/SQ. M.

20.0 - 23.0 LB/SQ. FT.
95 - 115 KG/SQ. M.

26.5 - 30.0 LB/SQ. FT.
130 - 150 KG/SQ. M.

STORM WATER RETENTION CAPACITY

0.50 - 0.80 GAL/SQ. FT.
20 - 30 L/SQ. M.

0.80 - 1.10 GAL/SQ. FT.
32 - 45 L/SQ. M.

1.10 - 1.40 GAL/SQ. FT.
45 - 58 L/SQ. M.



TREMCO

ROOFING & BUILDING MAINTENANCE

Providing Roofing and Weatherproofing Peace of Mind

UNITED STATES

3735 Green Road
Beachwood, Ohio
44122
T: 1.800.562.2728

CANADA

50 Beth Neelson Drive
Toronto, Ontario
M4H 1M6
T: 1.800.668.9879

An **RPM** Company

© 2014 Tremco Incorporated
Printed on stock containing
50% recycled content, including 25% PCW.

www.tremcoroofing.com



Project:
MILWAUKEE PUBLIC MUSEUM
Milwaukee, WI, USA

