


TREMLOCK® FLEXX

WALL PANEL SYSTEM

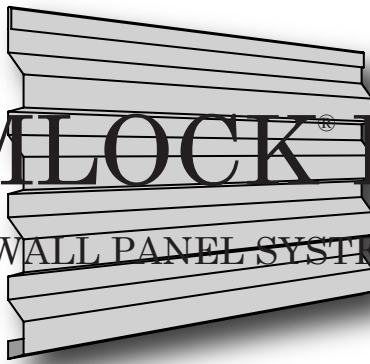

Composition and Material:

TremLock Flexx wall panel system is factory roll formed 24 or 22 gauge. Galvalume steel, zinc coated by hot-dip process per ASTM A792/A792M. The Galvalume panel is coated with Kynar 500 / Hylar 5000. Refer to color chart for available colors.

Basic Use:

TremLock Flexx wall panel is a concealed fastener wall panel. TremLock Flexx panel can be used as an exterior wall cover, and parapet wall applications. A variety of fastener options are available to meet the needs different substrate attachment.

System Design:


TremLock Flexx wall panels are designed with coverage of 16" wide and up to 48' in length. The TremLock Flexx wall panel is 3/4" high with a 4" rib spacing. The TremLock Flexx wall panel can be installed horizontally.

Application Data:

TremLock Flexx wall panels are installed over solid substrate with a concealed "Hook & Cleat" interlocking panel. All exposed fasteners shall be factory prepainted to match roof or wall panel colors. Panels are sealed at the base of wall with metal closures.

Finish and Color:

TremLock Flexx wall panels with factory applied finish. Topside: Full - strength 70% Kynar 500 or Hylar 5000 fluoropolymer resin system of 1.0 mil (.025 mm) total dry film thickness. Underside: Wash coat of 0.3 - 0.4 mil dry film thickness.

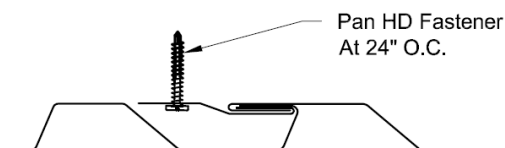

Clip attachment at seams

Details:


- A Concealed fastener "hook & cleat" interlocking panel.
- Asymmetrical horizontal ribs used on wall applications.
- Kynar 500 coating.

Panel Options:

- Panel height and width - 3/4" x 16"
- Acceptable substrates - Plywood, Nailers, Hat Channels, Purlins, Subgirts
- Standard substrate - Aluminum-Zinc coated steel
- 24 Gauge with option for 22 Gauge

Testing:

- ASTM E-1592 Uplift test

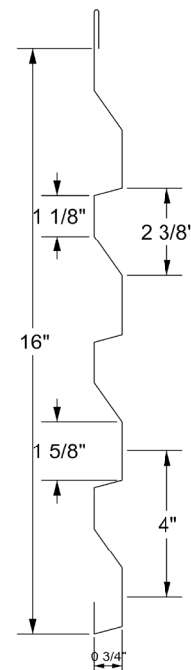

AVAILABILITY AND COST:

Contact your local Tremco Roofing Representative for pricing and availability. For the name and number of your local representative, call the Roofing Division at 216/292-5000.

MAINTENANCE:

Your local Tremco Roofing Representative can provide you with effective maintenance procedures, which may vary depending upon specific conditions. Periodic inspections, early repairs and preventive maintenance are all part of a sound roof program.

GUARANTEE/WARRANTY:

Tremco Incorporated warrants TremLock Flexx wall panel system to be free of defects and to meet published physical properties when tested according to ASTM and Tremco standards. Under warranty, any TremLock Flexx product that is proved to be defective when applied in accordance to our written instructions, and in applications recommended by Tremco as suitable for this product will be replaced with like product at no charge. THIS IS BUYER'S SOLE AND EXCLUSIVE REMEDY.

All claims concerning product defects must be made in writing within twelve (12) months of shipment. The absence of such claims in writing during this period will constitute a waiver of all claims with respect to such product.

This warranty shall be IN LIEU of any other warranty, express or implied, including but not limited to, any implied warranty of MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.

TECHNICAL SERVICES:

Your local Tremco Representative, working with the Technical Service staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the services of the Tremco Technical Service Staff.

STATEMENT OF POLICY AND RESPONSIBILITY:

Tremco takes responsibility for furnishing quality materials and for providing specifications and recommendations for their proper installation.

As neither Tremco itself or its Representatives practice architecture or engineering, Tremco offers no opinion on, expressly disclaims any responsibility for the soundness of any structure on which its products may be applied. If questions arise as to the soundness of a structure or its ability to support a planned installation properly, the Owner should obtain the opinion of competent structural engineers before proceeding. Tremco accepts no liability for any structural failure or for the resultant damages, and no Tremco Representative is authorized to vary this disclaimer.

Kynar 500 is a registered trademark of Elf Autochem North America, Inc.
Hylar 5000 is a registered trademark of Ausimont USA, Inc.
TremLock is a registered trademark of Tremco Incorporated