


MEMBRANE PROTECTION PLY—  
FLEECE BACKED WHITE SINGLE  
PLY (LOOSE LAID ON ROOF)

PIPE SUPPORT  
SET IN SEALANT—SEE NOTE 2

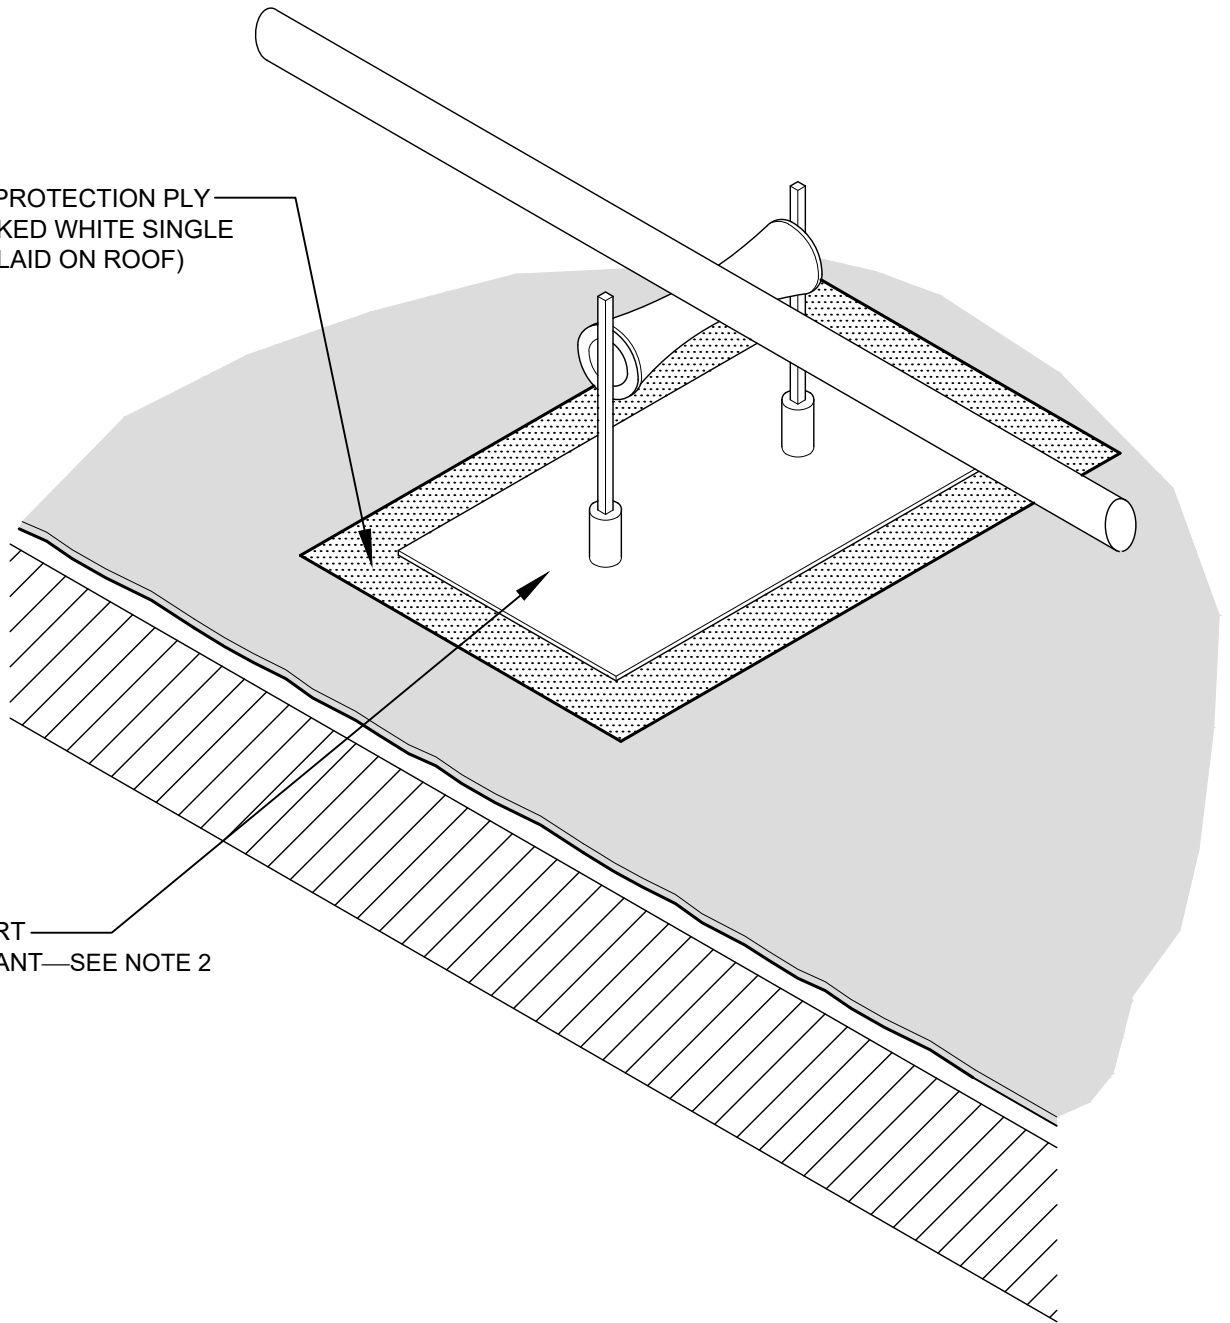

## NOTES

1. THIS DETAIL IS DESIGNED TO ELIMINATE ROOF DAMAGE DUE TO EXPANSION AND CONTRACTION OF PIPES.
2. PIPE SUPPORT PROFILES VARY. REFER TO THE MANUFACTURER FOR LOAD CAPACITY AND RECOMMENDED SPACING OF SUPPORTS.
3. PRIMING OF THE SUBSTRATE MAY BE REQUIRED, FOLLOW SPECIFICATIONS AND MANUFACTURER RECOMMENDATIONS.
4. REINFORCEMENT MUST BE FULLY SATURATED OR ENCAPSULATED IN BASE COAT AS DESCRIBED IN SPECIFICATIONS.
5. THE EXISTING LOOSE GRAVEL MUST BE REMOVED AND THE ROOF MUST BE REPAIRED PER MANUFACTURER REQUIREMENTS PRIOR TO APPLICATION OF THE LEVELING COAT.



SHEET TITLE:

PIPE SUPPORT GRAVEL BUR  
RESTORATION

SCALE:

NTS

DRAWING No.:

DWG NO. LA-GR-21A