


LIQUID-APPLIED REINFORCED FLASHING

EMBEDDED EDGE-METAL FLASHING—CLEAN TO BRITE METAL AND PRIME

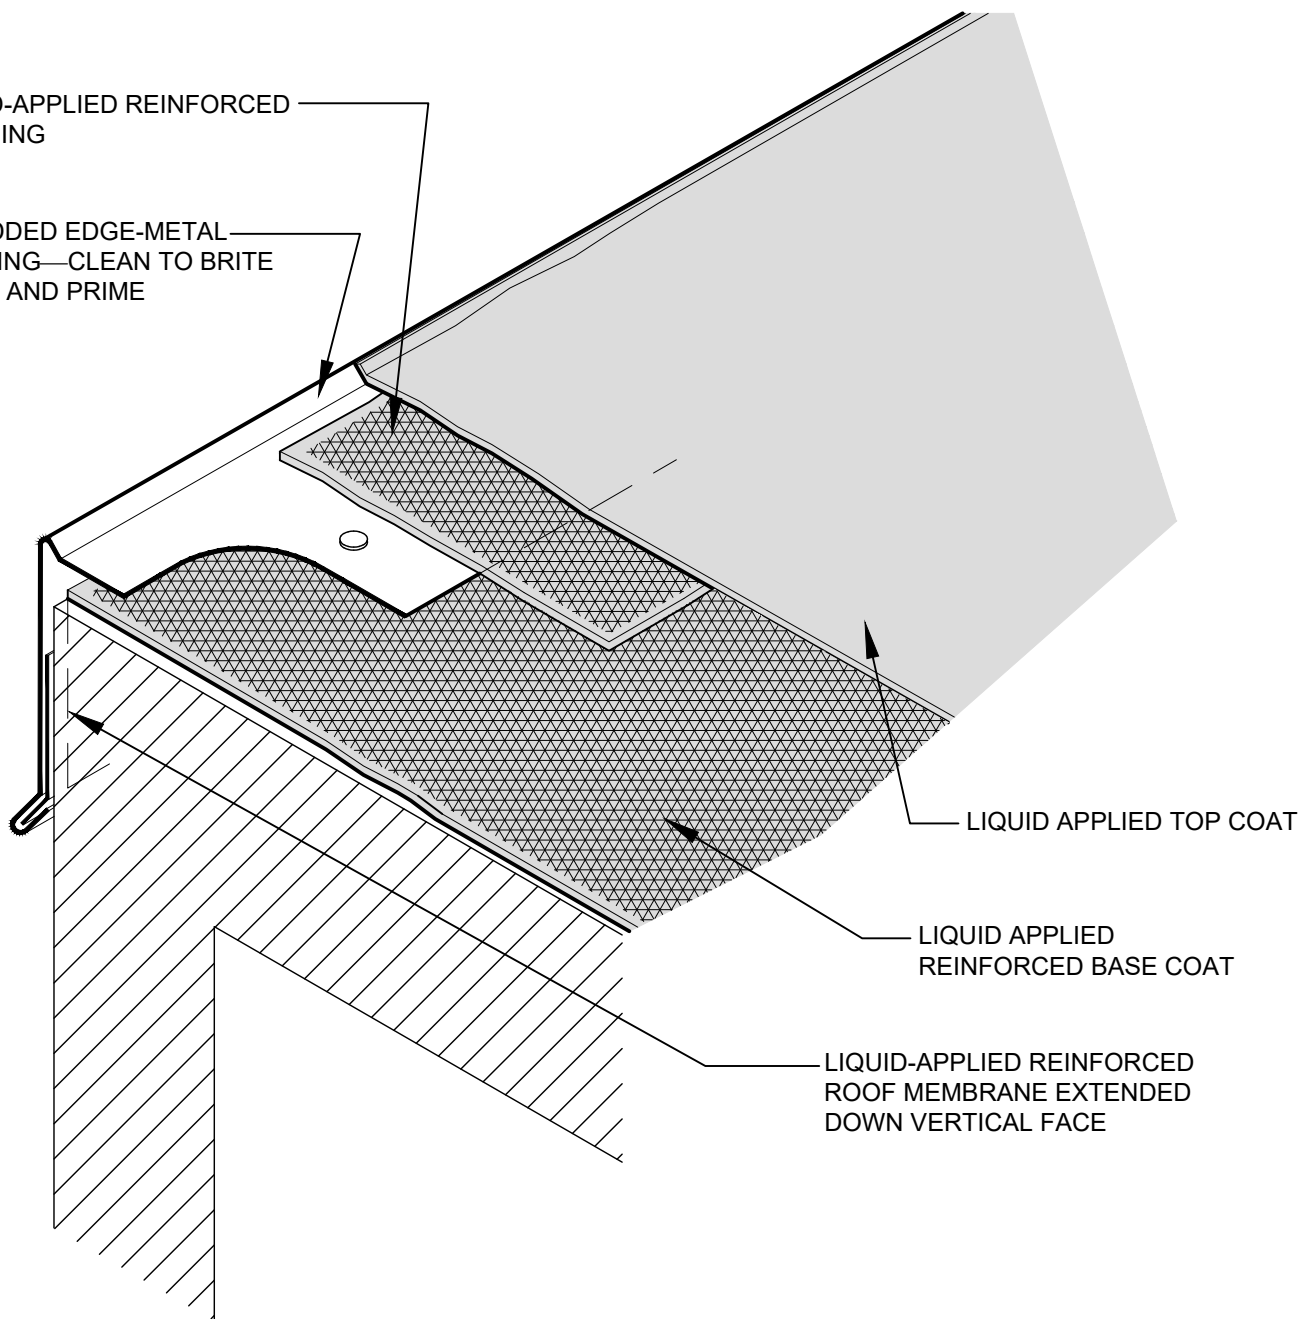

NOTES

1. PRIMING OF THE SUBSTRATE MAY BE REQUIRED. FOLLOW SPECIFICATIONS AND MANUFACTURER'S RECOMMENDATIONS.



SHEET TITLE:
EMBEDDED EDGE-METAL
FLASHING [GRAVEL STOP] FULLY
REINFORCED OVER CONCRETE

SCALE:
NTS

DRAWING No.:
DWG NO. LA-CFR-03