


NEW BASE PLY STRIPPING  
SET IN SPECIFIED SEALANT  
OR ADHESIVE

CLEAN TO BRIGHT  
METAL AND PRIME

LIQUID APPLIED TOP COAT

LIQUID APPLIED  
REINFORCED BASE COAT

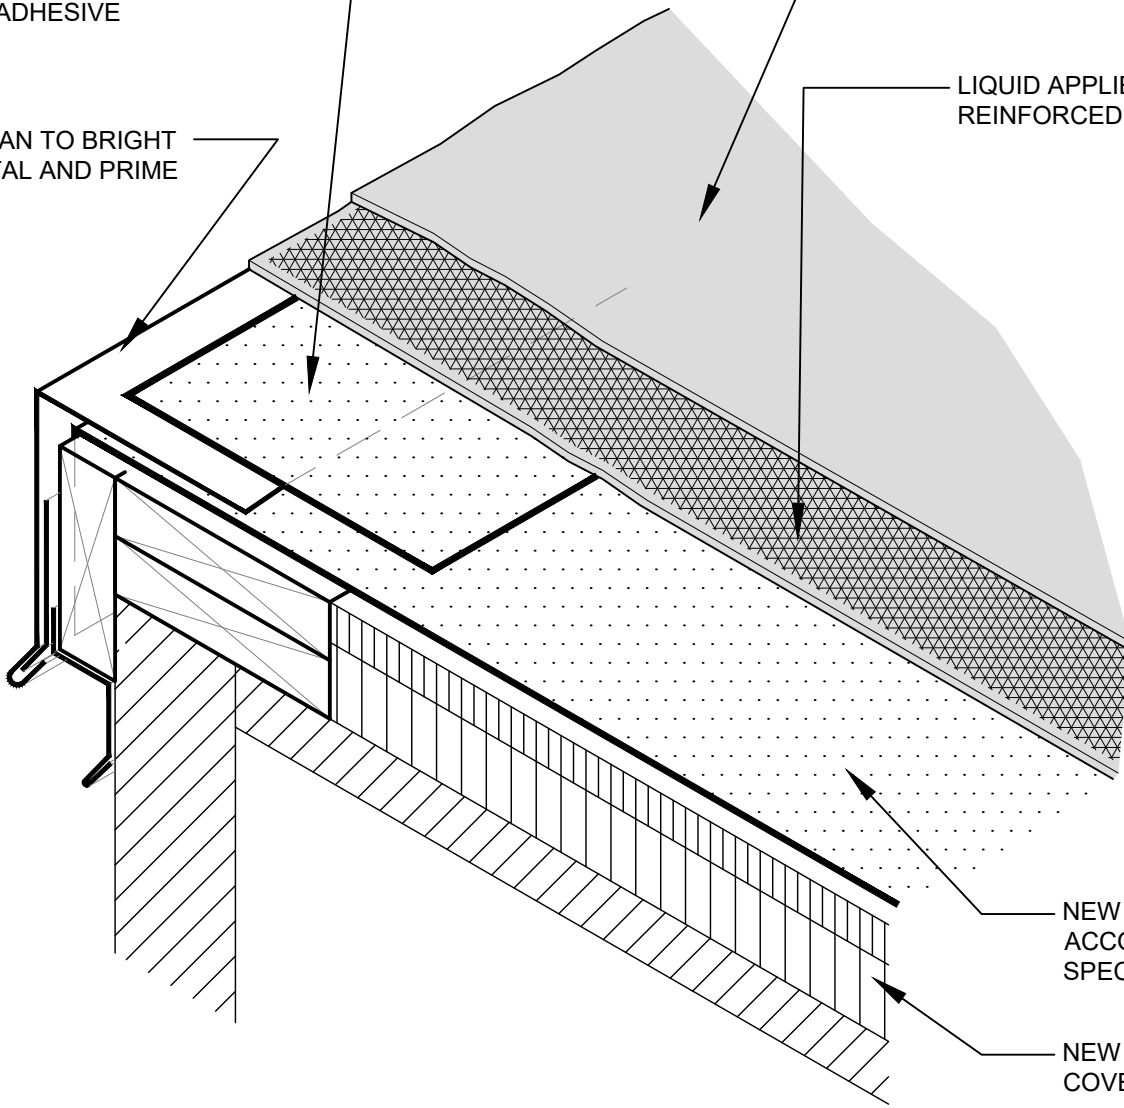

NEW BASE PLY INSTALLED  
ACCORDING TO  
SPECIFICATIONS

NEW INSULATION AND  
COVERBOARD

## NOTES

1. PRIMING OF THE SUBSTRATE MAY BE REQUIRED, FOLLOW SPECIFICATIONS AND MANUFACTURER RECOMMENDATIONS.
2. REINFORCEMENT MUST BE FULLY SATURATED OR ENCAPSULATED IN BASE COAT AS DESCRIBED IN SPECIFICATIONS.