

TremLock® M Panel

Exposed Fastener Panel

FEATURES

- Versatile
- Greater than normal spans and load carrying

BENEFITS

- Wall, roof or interior accent panel
- High-strength performance capabilities



DESCRIPTION

TremLock "M" panels were designed and engineered with greater-than-normal spans and load-carrying characteristics in mind. And, they quickly communicate their high-strength performance capabilities.

BASIC USES

TremLock "M" panel is an exposed roof and wall panel. TremLock "M" panel can be used as an exterior wall cover or roof panel, excellent for use on screen walls, equipment screens and parapet wall applications. A variety of fastener options are available to meet the needs of appearance and different substrate attachment.

SYSTEM DESIGN

TremLock "M" panels are designed 39 3/8" wide with a coverage of 34 3/4" and up to 50' in length. The TremLock "M" panel is .5" high with 2" corrugations between each of the major corrugations the entire length of panel.


APPLICATION

Exposed fastener wall / roof panel used on slopes down to 1:12. (Tape sealant is required on seam (side laps). Standard panel lengths up to 50'. Please inquire for longer lengths.

FINISH/COLOR

- Acrylic-coated Galvalume*
- Fluoropolymer (Kynar 500® PVFD resin-based)
- Siliconized Polyester and Polyester
- Oil canning is inherent in all metal panels and is not cause for panel rejection.

SECTION PROFILE

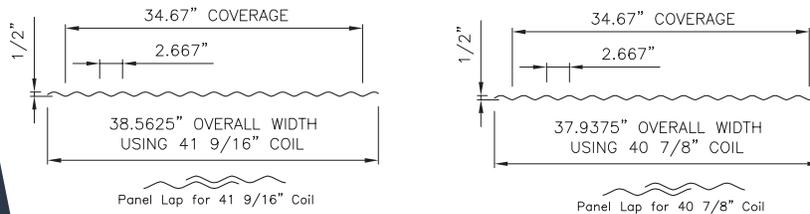


Fastener Patterns:

@ Eaves, Ridges and Endlaps:



@ Intermediate Purlins:



Foam Inside/Outside Closure:



TESTING

TITLE OF TEST	TEST METHOD
Fire Rating:	UL 790 Class A
Impact Resistance:	UL 2218 Class 4

TremLock® M Panel

MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Roofing sales representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

220 Wicksteed Avenue
Toronto, Ontario, M4H 1G7
1.800.668.9879

Tremco Roofing and Building
Maintenance is part of Tremco
Construction Products Group.

Tremco is a US Registered trademark of Tremco CPG Inc.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco CPG Inc.

Kynar 500® is a U.S. registered trademark of Arkema Inc.

Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.

Galvalume® is a U.S. registered trademark of BIEC International Inc.

Fluoropon® is a U.S. registered trademark of SWIMC LLC.