

TremLock® Soffit Panel

*Concealed fastener
soffit and wall panels*



FEATURES

- Ventilated Option

BENEFITS

- Allows for airflow

DESCRIPTION

TremLock Soffit panels are factory roll formed 24 or 29 gauge Galvalume® steel, zinc coated by hot-dip process per ASTM A792/A792M. The Galvalume panel is coated with Kynar 500® / Hylar 5000®. Refer to color chart for available colors.

BASIC USES

TremLock Soffit panels are intended for use as a soffit panel only. TremLock Soffit panels are not intended for use in roofing or mansard applications. These panels can also be vented to allow for airflow and under eave ventilation.

SYSTEM DESIGN

TremLock Soffit Panels are designed for soffit applications. The Soffit panels have coverage of 12" for vented or non vented panels a height of 3/8" with major rib spacing 6" oc. minimum length of 6" and maximum length of 20 ft . The vented soffit panel has a 10% net free area.


FINISH/COLOR

Acrylic Coated Galvalume
Fluoropolymer (Kynar 500 PVDF Resin Based)
Siliconized Polyester (16" 29 ga.)
Oil canning is inherent in all metal panels and is not cause for panel rejection


APPLICATION

TremLock Soffit panels are typically installed over solid substrate or open framing under eave.


PANEL PROFILES

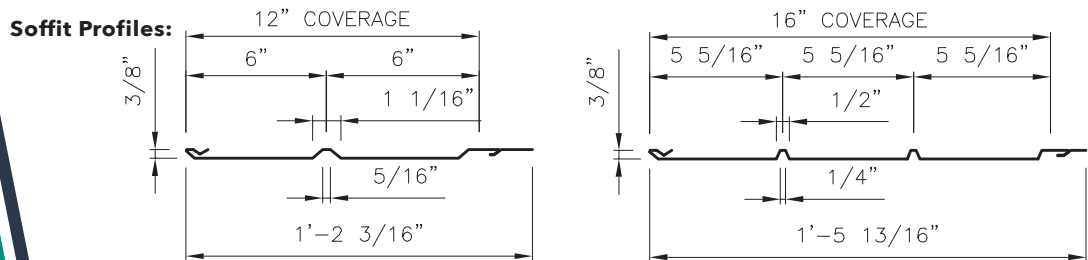

Seam:




Vented Panels 12" and 16" (10% Net Free Air):

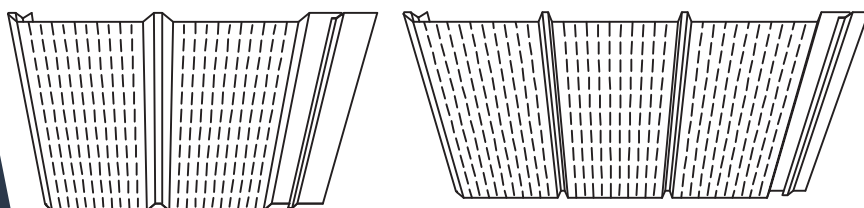

TremLock® Soffit Panel

PANEL PROFILES CONTINUED

Non-Vented Panels 12" and 16":

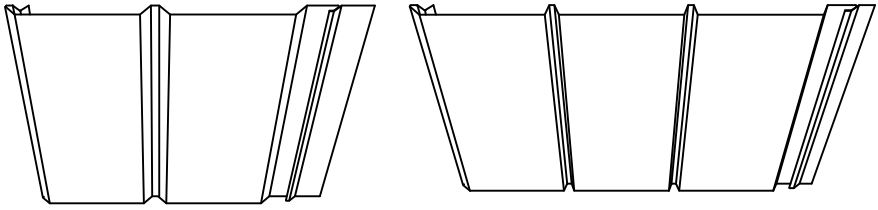

TESTING

TITLE OF TEST	TEST METHOD
Uplift	ASTM E1592

MAINTENANCE

Your local Tremco Roofing sales representative can provide you with effective maintenance procedures which may vary, depending upon specific conditions. Periodic inspections, early repairs and preventative maintenance are all part of a sound roof program.

PRECAUTIONS

Users must read container labels and Safety Data Sheets for health and safety precautions prior to use.

TECHNICAL SUPPORT

Your local Tremco Representative, working with the Technical Service Staff, can help analyze conditions and needs to develop recommendations for special applications. The services of the Tremco Research Center, which has earned a unique reputation in weatherproofing technology, complement and extend the service of the Tremco Service Staff.



www.tremcoroofing.com
3735 Green Road
Beachwood, Ohio 44122
1.800.852.6013

220 Wicksteed Avenue
Toronto, Ontario, M4H 1G7
1.800.668.9879

Tremco Roofing and Building
Maintenance is part of Tremco
Construction Products Group.

Tremco is a US Registered trademark of Tremco CPG Inc.

The information provided on this data page supersedes all previous data concerning this product and its application.

The Statements provided concerning the materials shown are intended solely as a general guide for material usage and are believed to be true and accurate. Since the manner of use is beyond our control, Tremco DOES NOT MAKE NOR DOES IT AUTHORIZE ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PURPOSE, OR ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION, EXPRESSED OR IMPLIED, CONCERNING THIS MATERIAL EXCEPT THAT IT CONFORMS TO TREMCO'S PRODUCT SAMPLE. Buyer and user accept the product under those conditions and assume the risk of any failure, injury of person or property and loss or liability resulting from the handling, storage or use of the product, whether or not it is handled, stored, used in accordance with directions or specifications. UNDER NO CIRCUMSTANCE SHALL TREMCO BE LIABLE FOR CONSEQUENTIAL OR INCIDENTAL DAMAGES ARISING FROM ANY BREACH OF WARRANTY. IN ALL CASES, TREMCO'S LIABILITY IS LIMITED, AT TREMCO'S OPTION, TO THE REPLACEMENT OF GOODS, OR THEIR VALUE, PROVEN TO BE DEFECTIVE IN MANUFACTURING.

TremLock® is a U.S. registered trademark of Tremco CPG Inc.

Kynar 500® is a U.S. registered trademark of Arkema Inc.

Hylar 5000® is a U.S. registered trademark of Solvay Solexis, Inc.

Galvalume® is a U.S. registered trademark of BIEC International Inc.

Fluoropon® is a U.S. registered trademark of SWIMC LLC.