

SYSTEM PROFILE

VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

SYSTEM OVERVIEW

Tremco's VR LITE vegetated roof assemblies give designers all the functional elements of a high performance green roof adapted to budgetary and structural limitations. VR LITE systems offer succulent planting options in three growing media depths to suit your project's design parameters.

Whether you are concerned about cost, maintenance, or structural load capacities, there is a VR LITE system that is right for your project, while still

providing storm water retention and ecologically sustained plant communities that consistently outperform comparable green roof systems.

Don't settle for second rate green roof systems anymore. With Tremco's VR LITE, you can deliver the green roof landscape you want, without breaking the bank or the roof.

MINIMUM MATERIALS. MINIMUM COST.

STILL OUT-PERFORMS THE COMPETITION.

STANDARD FEATURES & OPTIONS

- A heavy-duty percolation layer provides drainage below the growing media and prevents root rot
- Upgrade to a combined water retention and drainage panel for additional storm water retention
- Standard growing media depths of 2", 3" and 4"
- Desert Succulent plantings can be installed via cuttings, plugs, or prevegetated mats. Standard and custom blends available.




SYSTEM DETAILS

VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

SYSTEM COMPONENTS

- A ROOT BARRIER
- (STANDARD) **B** PERCOLATION LAYER WITH FILTER FABRIC OVERLAY
- (UPGRADE) C WATER RETENTION & DRAINAGE PANEL WITH FILTER FABRIC OVERLAY
 - **D** ENGINEERED GROWING MEDIA
 - E VEGETATION OPTIONS: SEDUM BLENDS
 - F EDGING RESTRAINT
 - **G** VEGETATION-FREE ZONE

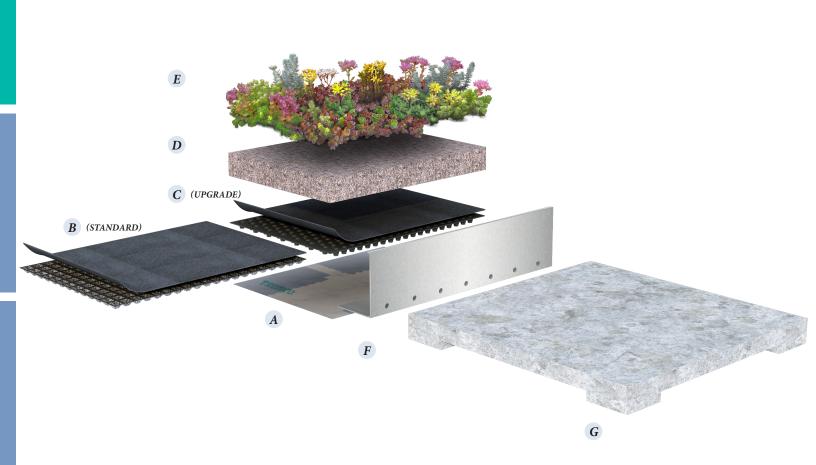



SYSTEM CRITICAL DATA SHEET

TREMCO"VR LITE

EXTENSIVE THIN LIGHTWEIGHT BUILT-UP SYSTEM

ACCESSORIES ROOT BARRIER

ROOT BARRIER
DRAIN INSPECTION BOX
EDGING RESTRAINT
IRRIGATION







SYSTEM

VR LITE 2 VR LITE 3 VR LITE 4

GROWING MEDIA DEPTH

2" 3" 4" 50 MM 75 MM 100 MM

VEGETATION OPTIONS

SEDUM BLENDS: SEDUM BLENDS: SEDUM BLENDS: STANDARD STANDARD CUSTOM STANDARD CUSTOM CUSTOM

SATURATED WEIGHT

13.5 - 16.0 LB/SQ. FT. 20.0 - 23.0 LB/SQ. FT. 26.5 - 30.0 LB/SQ. FT. 26.5 - 80 KG/SQ. M. 95 - 115 KG/SQ. M. 130 - 150 KG/SQ. M.

STORM WATER RETENTION CAPACITY

 0.50 - 0.80
 GAL/SQ. FT.
 0.80 - 1.10
 GAL/SQ. FT.
 1.10 - 1.40
 GAL/SQ. FT.

 20 - 30
 L/SQ. M.
 32 - 45
 L/SQ. M.
 45 - 58
 L/SQ. M.









UNITED STATES 3735 Green Road Beachwood, Ohio 44122 T: 1.800.562.2728 CANADA 50 Beth Nealson Drive Toronto, Ontario M4H 1M6 T: 1.800.668.9879

